


ADHESIVE TABLE WITH FLOW-OPTIMISED FLAT EXTRACTION HOOD

PK-IAT-KL



Energy and airflow-optimised extraction table with supply air curtain and Coanda effect baffle plate suction.

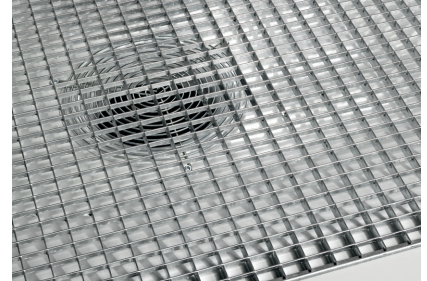

Standard equipment

- Height-adjustable feet (mech.) + 70 mm
- Earth connection
- LED task light with adjustable angle of illumination, IP 65, 230 V with polycarbonate impact and dirt protection
- Connection cable with commando plug, length 5 m (approx.)
- Stainless steel side curtain rails
- GRP gratings
- Supply air unit with aerodynamically optimised baffle plate suction
- Flat extraction hood with inlet nozzle



Special equipment (at extra cost)

- Stepless height adjustment with electric lift cylinder
- Air curtain with incl. ON/OFF switch
- Extract fans and filtering systems
- Pre-assembled system pipework
- Special colours, special paint finishes (RAL)
- Clear PVC strip antistatic curtains
- Fixed and folding steel side walls
- Customer choice of RAL colours
- Spacers to adjust height of work surface by 80 mm
- Rotary tables and vices
- ATEX zone 1/21 LED light

ADHESIVE TABLE WITH FLOW-OPTIMISED FLAT EXTRACTION HOOD

TYPE	PK-IAT-KL 1000	PK-IAT-KL 1400	PK-IAT-KL 2000
Art. No.	A40031	A40031	A40031
Work surface width x depth	1000 x 900 mm	1400 x 900 mm	2000 x 900 mm
Working height	875 mm	875 mm	875 mm
Table interior height	1165 - 1275 mm	1165 - 1275 mm	1165 - 1275 mm
Overall width	1195 mm	1595 mm	2195 mm
Table height	2388 mm	2388 mm	2388 mm
Overall depth	1148 mm	1148 mm	1148 mm
Typical extraction rate and ACPH	1000 m ³ /h / 18 x	1400 m ³ /h / 18 x	2000 m ³ /h / 18 x
Supply air	Approx. 250 m ³ /h	Approx. 250 m ³ /h	Approx. 250 m ³ /h
Exhaust connection	2 x DN 200	2 x DN 200	1 x DN 250, 2 x DN 200
Weight	170 kg	190 kg	280 kg